


See Us At OTC 2016, Booth 4979, Houston, May 2-5

Stop Pulling Meters for Calibration Verification With VeriCal System For FCI ST100 Air/Gas Flow Meter

Ideal For Offshore Platforms & Other Hard To Access Production Environments

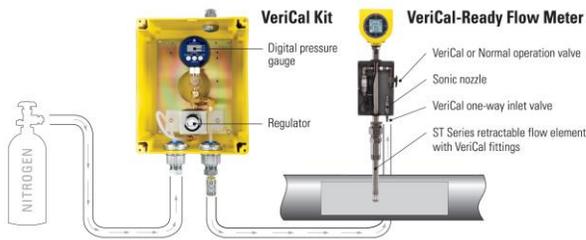

San Marcos, CA — Oil/gas engineers responsible for performing routine flow meter calibration verifications who want to eliminate the hassle and cost of shutting down the line, pulling the meter, installing a spare and paying a lab fee will find the [VeriCal™ In-Situ Calibration Verification System](#) with the [ST100 Series Thermal Mass Flow Meter](#) from [Fluid Components International \(FCI\)](#) eliminates all the problems.

A demo of the VeriCal In-Situ Calibration Verification System with the ST100 Flow Meter will be available in FCI Booth 4979 at the 2015 Offshore Technology Conference (OTC). This industry unique system reduces flow meter operating costs in flare gas applications aboard offshore platforms, at land-based oil/gas facilities and in petrochemical plants.

Designed for regulatory compliance, the ST100 Flow Meter with the VeriCal In-Situ Calibration System meets the US Minerals Management Service (MMS) Rule, 30 CFR Part 250, Subpart K, Section 250, stipulating that all domestic US offshore rigs processing more than an average of 2000 bopd must install flare/vent gas flow meters. These regulations are intended to protect the environment through the monitoring of greenhouse gases (GHG).

The VeriCal In-Situ Calibration System verifies ST100 Flow Meter calibration in minutes without removing the meter from the pipe or process to meet MMS regulations. In the past, flow meters had to endure the cost and hassle of being pulled from the process, then returned to the manufacturer or a calibration lab for testing and then shipped back for re-installation.

Setting a new industry benchmark in process and plant air/gas flow measurement, the ST100 Series Flow Meter offers the most feature-rich and function-rich electronics available. The ST100's performance delivers unsurpassed adaptability and value to meet plant gas flow measurement applications for today and tomorrow.

No matter if the need is for 4-20 mA analog, frequency/pulse, alarm relays or digital bus communications such as HART, Fieldbus, Profibus or Modbus, the ST100 is the solution. Should a plant's needs change over time or an upgrade be desirable, the ST100 Flow Meter

-MORE-

adapts as necessary with a plug-in card replacement that can be changed out by plant technicians in the field.

With a unique graphical, multivariable, backlit LCD display/readout, the ST100 brings new meaning to the term "process information." It provides the industry's most comprehensive information with continuous display of all process measurements and alarm status, and the ability to interrogate for service diagnostics.

The easy-to-use ST100 stores up to five unique calibration groups to accommodate broad flow ranges, differing mixtures of the same gas and multiple gases, and obtains up to 1000:1 turndown. Also standard is an on-board data logger with an easily accessible, removable 2-GB micro-SD memory card capable of storing 21 million readings.

With two multi-variable core model families, oil/gas engineers can choose from the ST and STP families. ST meters measure both mass flow and temperature, and the exclusive STP family adds a third parameter, pressure, making the ST100 the world's first triple-variable thermal flow meter. Both families include single-point and dual-element models as configurations.

The ST100 can be calibrated to measure virtually any process gas, including wet gas, mixed gases and dirty gases. The basic insertion style air/gas meter features a thermal flow sensing element that measures flow from 0.25 to 1000 SFPS (0.07 NMPS to 305 NMPS) with accuracy of ± 0.75 percent of reading, ± 0.5 percent of full scale.

Designed for rugged industrial processes and plants, ST100 Flow Meters include service up to 850°F (454°C) and are available with both integral and remote (up to 1000 feet [300 meters]) electronics versions. The ST100 is agency approved for hazardous environments, including the entire instrument, the transmitter and the rugged, NEMA 4X/IP67 rated enclosure. Instrument approvals in addition to SIL-1 include ATEX, IECEx, FM and FMc.

Fluid Components International is a global company committed to meeting the needs of its customers through innovative solutions for the most challenging requirements for sensing, and measuring flow, pressure and temperature of gases.

Contact: FCI: 1755 La Costa Meadows Dr, San Marcos, CA 92078
Web: www.fluidcomponents.com Tel: 800-854-1993 Tel: 760-744-6950 Fax: 760-736-6250
Email: FCImarcom@fluidcomponents.com